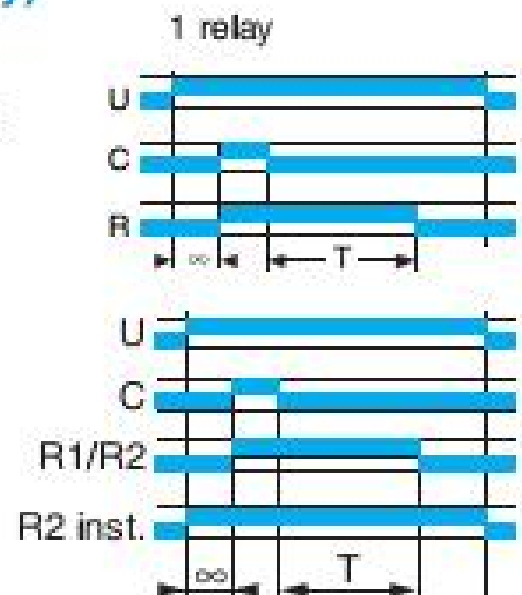

→ Function C : Timing after impulse Delay OFF (with constant supply)

After energisation, once the control contact is closed the output state changes.

Timing will only begin on the re-opening of this control contact (one shot).

Relay R returns to its initial position at the end of the timing period.

2 relays timed or
1 relay timed and 1 instantaneous



Function	Timing (to be specified when ordering)	Voltage	Connection	Designation	Solid state output	
A	60 min	12 VDC	Faston connectors 6.35 mm	SAS	0,7 A	Page 50
		24 VAC				
		48 VAC				
		110 VAC				
		220-240 VAC				
Ap	100 s	12 VDC	Faston connectors 6.35 mm	SAS P	0,7 A	Page 50
		24 VAC				
		48 VAC				
		110 VAC				
		220-240 VAC				
Ad	60 min	12 VDC	Faston connectors 6.35 mm	SAS D	0,7 A	Page 50
		24 VAC				
		48 VAC				
		110 VAC				
		220-240 VAC				
Ai	60 min	12 VDC	Faston connectors 6.35 mm	SAS I	0,7 A	Page 50
		24 VAC				
		48 VAC				
		110 VAC				
		220-240 VAC				
B	60 min	24 VAC	Faston connectors 6.35 mm	SBS	0,7 A	Page 52
		48 VAC				
		110 VAC				
		230 VAC				
Bp	100 s	24 VAC	Faston connectors 6.35 mm	SBS P	0,7 A	Page 52
		48 VAC				
		110 VAC				
		230 VAC				
Bd	60 min	24 VAC	Faston connectors 6.35 mm	SBS D	0,7 A	Page 52
		48 VAC				
		110 VAC				
		230 VAC				
C	60 min	24 VAC	Faston connectors 6.35 mm	SCS	0,7 A	Page 53
		48 VAC				
		110 VAC				
		230 VAC				

